


# WSR 250 RF



Spannsatz WSR 250 - RF  
Locking assembly WSR 250 - RF

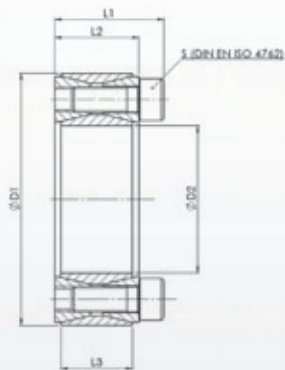

Bestellbeispiel / Ordering Example WSR 250 - 42 x 75 - RF  
Typ / Type D2 x D1

D2 x D1	TKN	Abmessungen / Dimensions (mm)			Flächenpressung / Surface Pressure		Spannschraube / Locking Screw		
		L1	L2	L3	PW	PN	SA	S	TA
20x47	110	26	20	17	133	57	8	M6	8
22x47	120	26	20	17	121	57	8	M6	8
24x50	150	26	20	17	125	60	9	M6	8
25x50	155	26	20	17	120	60	9	M6	8
28x55	170	26	20	17	107	55	9	M6	8
30x55	185	26	20	17	100	55	9	M6	8
32x60	265	26	20	17	125	66	12	M6	8
35x60	290	26	20	17	114	67	12	M6	8
38x65	390	26	20	17	131	77	15	M6	8
40x65	410	26	20	17	125	77	15	M6	8
42x75	595	32	24	20	138	78	12	M8	18
45x75	635	32	24	20	129	78	12	M8	18
48x80	680	32	24	20	121	73	12	M8	18
50x80	700	32	24	20	116	73	12	M8	18
55x85	905	32	24	20	123	80	14	M8	18
60x90	990	32	24	20	113	76	14	M8	18
65x95	1225	32	24	20	119	82	16	M8	18
70x110	1875	38	28	24	131	84	14	M10	35
75x115	2010	38	28	24	123	80	14	M10	35
80x120	2145	38	28	24	115	77	14	M10	35
85x125	2600	38	28	24	124	84	16	M10	35
90x130	2750	38	28	24	118	81	16	M10	35
95x135	3280	38	28	24	125	88	18	M10	35
100x145	3870	45	33	26	121	84	14	M12	60

Empfohlene Bearbeitungstoleranz:  
Welle h8 / Nabe H8  

- Sondergrößen auf Anfrage
- Ausführung in Edelstahl

Tolerances: shaft h8 / hub H8  

- Special sizes available on request
- Stainless steel